


- 1. Diameter of flow meter and pipework to suit
- to or perpendicular to front boundary to suit
- 3. Non-return valve to be in approved pit with
- safety lid if installed underground.

 4. Pipe to be installed by boring under existing roads. Refer Drawing 10305.

 5. The flow cut off calibration setting for the Magnetic Flow Meters to be confirmed by Council prior to installation.

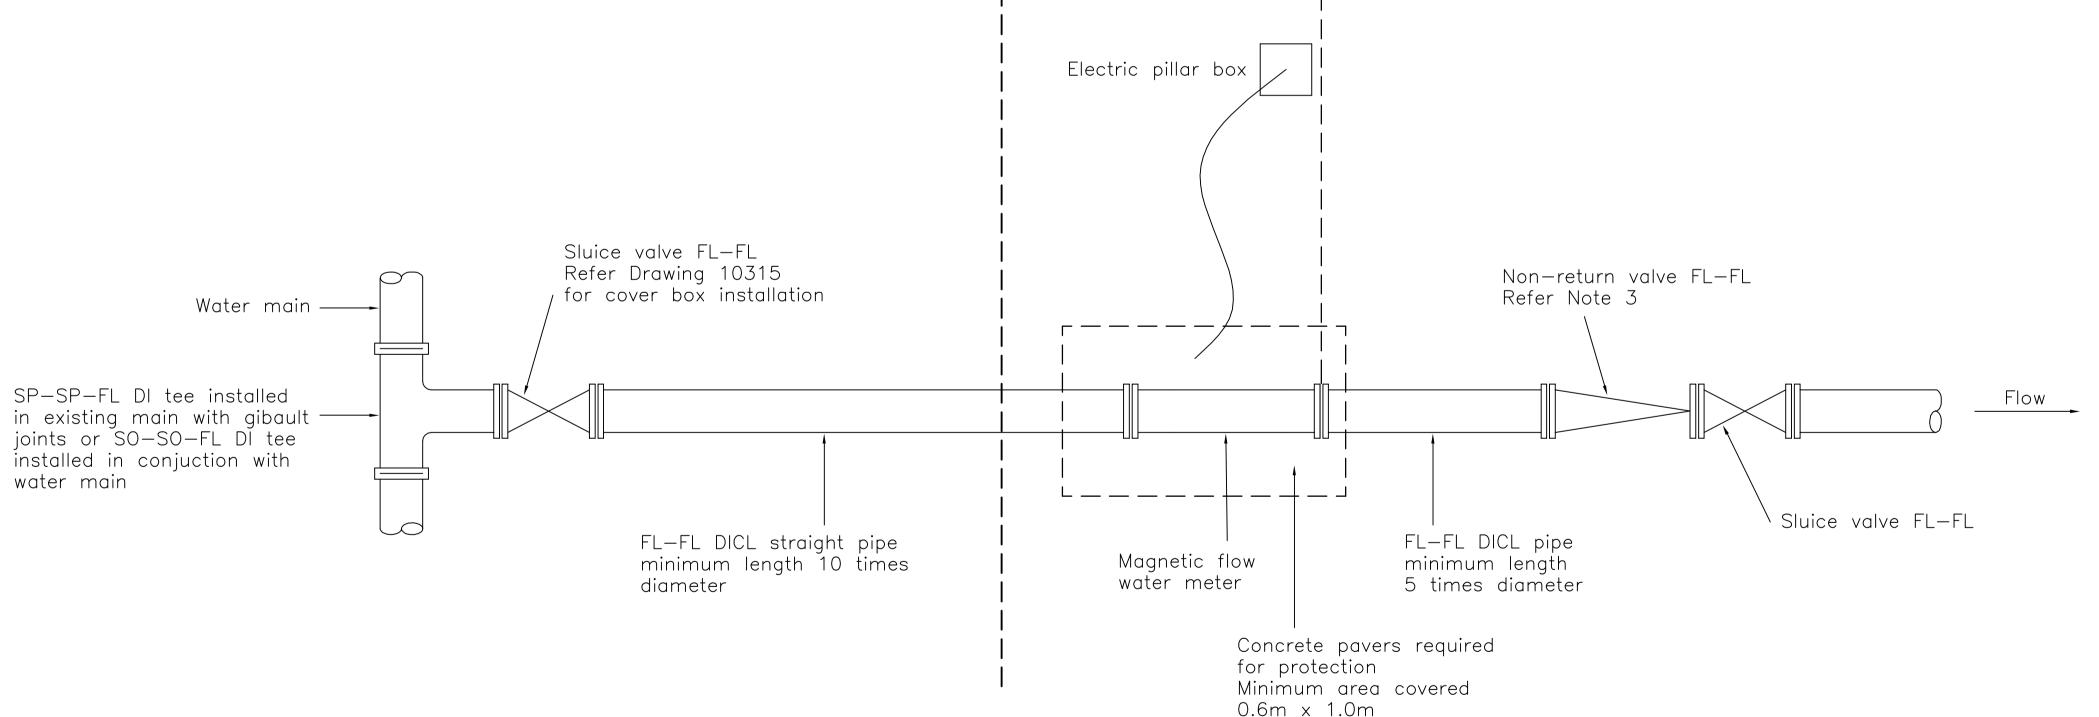

TYPICAL PLAN (WATER MAIN ON SAME SIDE OF ROAD)

D 20/5/2000	CALIBRATION NOTE ADDED	NOTES: Not to Scale Supersedes 10048A		CITY OF THURINGOWA 86 Thuringowa Drive, Thuringowa Central, QLD. 4817 Phone: 07 4773 8411 Fax: 07 4773 8600
A 1/7/99	ORIGINAL ISSUE		drawn: NRN	Engineer Approved: Original Signed by C.Phillips Date: 30/5/2000
No. DATE	DESCRIPTION AP'D		DIAWN. THAT	
REVISIONS			CHECKED: WJP	D.E.S. Approved: Original Signed by B.Bailey Date: 30/5/2000

MAGNETIC FLOW METER INSTALLATION

STANDARD DRAWING WATER 10355 AB